

G 1000



Automatic granular ice flakers.

Inner and outer structure of stainless steel 18/8.

Compact granular ice for various different uses in restaurants, fish-shops, self-service and industries.

Modular models, without internal ice storage bin. Must be combined with a collection Bin (different models available).

Produttori automatici di ghiaccio a scaglie granulari.

Struttura interna ed esterna interamente in acciaio inox 18/8.

Ghiaccio a granuli compatti, per i diversi impieghi in ristoranti, pescherie, self-service ed industrie.


Modelli modulari, senza deposito interno di raccolta ghiaccio, occorre abbinarli ad un contenitore di raccolta Bin (disponibile in diversi modelli).



G 1000



G 1000

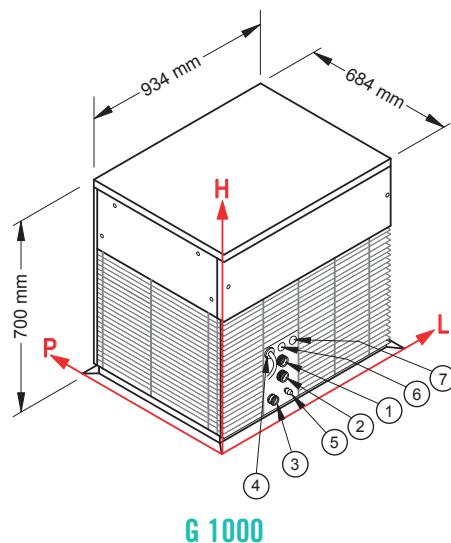

G 1000

CONNECTIONS / CONNESSIONI		G 1000		
		L	H	Ø
① Ice production water inlet / Ingresso acqua produz. ghiaccio		357	115	3/4"
② Condenser water inlet / Ingresso acqua per condensatore *		385	241	3/4"
③ Water outlet / Scarico acqua		336	60	24 mm
④ Electrical connection / Connessione elettrica		322	257	-
⑤ Condenser water outlet / Scarico acqua condensatore *		381	60	24 mm
⑥ Remote connection / Collegamento remoto		322	216	-
⑦ Connection to DRB 500 / Collegamento a DRB 500		322	181	-

* only for water cooling systems / solo per condensazione ad acqua

TECHNICAL INFORMATION / DATI TECNICI		G 1000
Production in 24 h / Produzione in 24h		1000 kg
Cooling system / Condensazione		A - W
Refrigerant / Refrigerante		R404A
Usable Bin / Bin utilizzabile		Bin 550 V DS - DRB 500 DRB 1200
Standard voltage / Voltaggio standard		400-415 V 3N ~ 50 Hz
Electrical consumption / Consumo elettrico		3200 W
Fuse / Fusibile		16 A
Water consumption (l/kg) / Consumo acqua (l/kg)		A 1 W 5,3
Sizes (WxDxH) / Dimensioni [LxPxH]		934x684x700 mm
Sizes with packing (WxDxH) / Dimensioni con imballo [LxPxH]		995x765x890 mm
Weight (net/gross) / Peso [netto/lordo]		172/195 kg

Finishing 18/8 stainless steel, scotch brite / Finitura acciaio inox 18/8, scotch brite

Gli apparecchi sono da considerarsi in Classe tropicale (Temperatura ambiente fino a 43°C). / The equipment are to be considered in tropical class (ambient temperature up to 43 °C).

INSTALLATION CONDITIONS / CONDIZIONI D'INSTALLAZIONE	Min / Max
Installation / Installazione	indoor / interna
Ambient temperature / Temperatura ambiente	+10 / +43 °C
Water temperature / Temperatura acqua	+3 / +32 °C
Voltage / Voltaggio	± 10%
Water inlet pressure / Pressione dell'acqua in ingresso	1bar (14psi) / 6bar (84psi)

CONDITIONS / CONDIZIONI	
Ambient temperature / Temperatura ambiente	+21°C
Water temperature / Temperatura acqua	+15°C
Electrical consumption at +43°C (standard voltage) / Consumo elettrico a +43°C (voltaggio standard)	